



Most fire incidents can be resolved by quick decisive action and the effective application of the correct extinguishing medium.

Quick Attack Cart does the same for any hydrocarbon or any flammable chemical spill fire at any warehouse or petrochemical plants.

Quick Attack Cart is effortlessly portable and can be handled by

one person. Equipped with solid rubber wheels or optional with the pneumatic wheels, which can be easily maneuvered on pavements or gravels.

Quick Attack Cart is designed with a rigid and compact Foam tank manufactured with SS316 sheets or optionally with GRP to store foam for adequate operational time.

## ***QUICK ATTACK FOAM CART***

# QUICK ATTACK FOAM CART

Foam tank is provided with a breathing valve to balance pressure inside the tank with ambient pressure and isolate the tank from external humidity, dust or any other debris. Foam tank is also equipped with a level gauge to monitor foam level inside the tank plus a drain plug to flush foam or replace foam inside the tank.

Foam Monitor and master stream nozzle with an inbuilt educator is available with multiple options on inlet connections, materials, flow rates etc. designed for use with Class A & Class B foam, Including AFFF & Fluro-protein. Combination of straight stream and variable fog patterns are available.

## FEATURES

- Nozzle is equipped with 3 % and 1% proportioning orifice as standard., it can be Interchangeable
- Fitted with cleared dial level gauge, to ensure level of foam in tank.
- Improved handling and mobility with greater operational stability.
- Rapid deployment of foam extinguishing agent.
- Low maintenance



# QUICK ATTACK FOAM CART

## SELF EDUCTING NOZZLE:

Available with,  
- 150 GPM @ 100 PSI  
- 225 GPM @ 100 PSI  
- 250 GPM @ 100 PSI  
- 350 GPM @ 100 PSI

## MONITOR:

Customized manual/ Remote  
Available with,  
- 150 GPM  
- 225 GPM  
- 250 GPM  
- 350 GPM

## HOSE:

Available with,  
- Synthetic Rubber  
- Single Jacket  
- Double Jacket  
- UL/FM approved  
- Brass coupling  
- Aluminum coupling  
- NH coupling  
- BS coupling

## LEVEL GAUGE:

Customized

## SOLID WHEEL:

Customized  
- 10 x 2.5" size  
- 15 x 3" size

## WATER INLET:

Customized inlet ,  
- NH coupling  
- BS coupling

## CHASSIS:


Customized with,  
- Thermoplastic coated steel  
- Alloy steel

## FOAM TANK :

Customized tank capacity  
25/40/50 Gallon , available in  
- SS304  
- SS316  
- GRP  
- Thermoplastic coated steel



# QUICK ATTACK FOAM CART

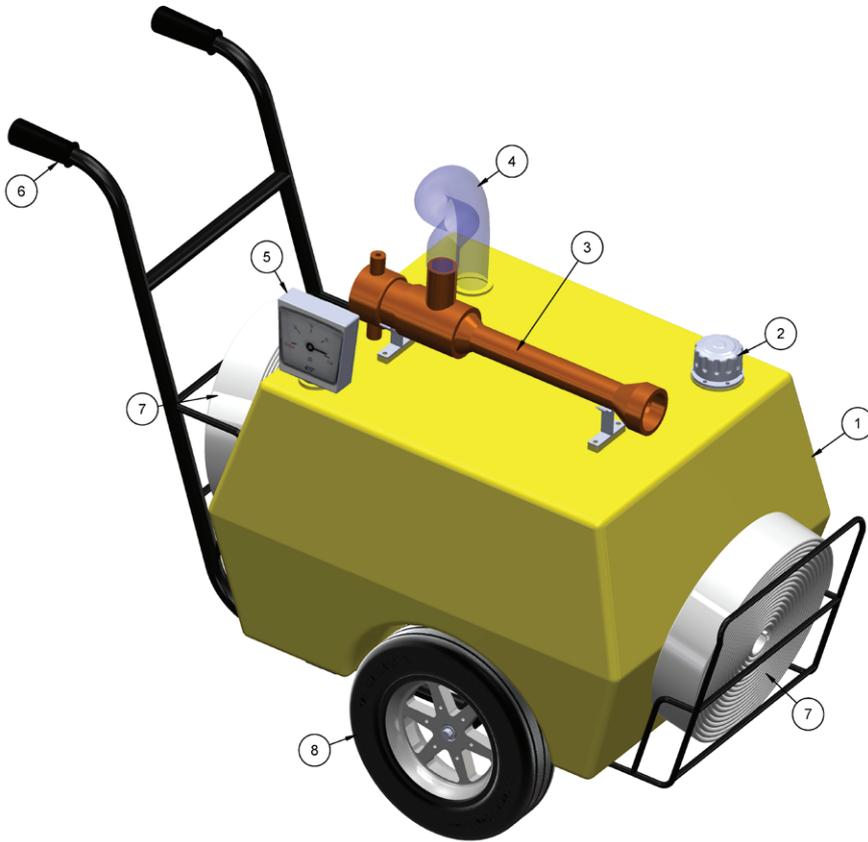

PRIMER	EPOXY	EPOXY PRIMER	50-70
INTERMEDIATE			
TOP COAT	PU	POLYURETHANE RAL 1016 YELLOW	50-70
COATING / TREATMENT SPECIFICATIONS :			
FBE			
HDG			

NOTE - CHASSIS FRAME AND HANDLE SHALL BE PRIMED AND PU TOP COATED WITH RAL 9005 BLACK.

BOM		
ITEM#	DESCRIPTION	QTY
1	POLYETHYLENE TANK 150 L CAP.	1
2	FOAM REFILL CAP	1
3	FOAM EDUCTOR	1
4	PICK-UP TUBE	1
5	TANK LEVEL GAUGE	1
6	CARRY HANDLE	1
7	FLAT HOSE 2.5" X25 MTR.	2
8	SOLID TIRE DIA 350	2

